

FH-IC6020

電磁+電陶煮食爐 Induction + Ceramic Hob



電磁爐 (左邊) 直徑180mm
Induction (Left) Ø180mm



電陶爐 (右邊) 直徑200mm
Ceramic (Right) Ø200mm

FH-IC6020

SPECIFICATIONS 規格

Number of Burner 爐頭數量	2		
Dimensions [mm] 尺寸	W700 x D430 x H82		
Timer 計時設定	1-180分鐘	1-180 mins	
Power Setting 烹調設定	9 段火力調校	9 steps	
Weight 重量	7.7 千克	7.7 Kg	
Power 功率	最高 3200 瓦	max. 3200W	
Ampere required 保險絲	15A		

電磁爐 (左邊) 200W~1800W
Induction (Left)
(當同時使用電陶爐,最高至1400W
max. 1400W when using Ceramic zone)
電陶爐 (右邊) 200W~1800W
Ceramic (Right)

*根據香港電壓 Based on voltage in Hong Kong: 220V 50Hz

CUT-OUT DIMENSIONS & REPLACEMENT SIZE [mm] 開孔和替換尺寸 [毫米]

Cut-out Dimensions 開孔尺寸 W670 x D400
Space preserved around the hole 開孔每邊預留 50mm

優越功能 ADVANCED FUNCTIONS

01/ 二合一 電磁爐+電陶爐 2-in-1 Induction + Ceramic Hob

只需要一部, 就能配合不同烹飪需要
1 Hob, unlimited cooking methods



02/ 兩種安裝方法 Two Installation Methods

座檯式或嵌入式安裝均可
Free standing or
Built-in installation



03/ 陶瓷玻璃面板 SCHOTT CERAN® Ceramic Glass Cooktop

安全及溫度穩定性極佳
Safety and extremely
stable temperature

獨特斜邊設計
Unique bevelled
edge design



04/ 9段火力調校 9 Steps Power Setting


05/ 爐具自動感應(電磁爐) Pan Sensor (Induction)

08/ 兒童安全鎖 Child Safety Lock

06/ 安全功能-自動關機 Safety feature- Auto shut off

2小時自動關機
Auto shut off after 2 hours

INSTALLATIONS 安裝

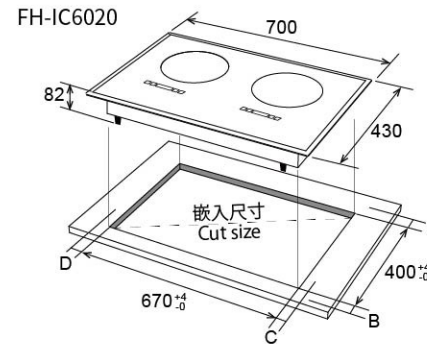

開孔周圍預留至少50mm空間(A,B,C,D)
50mm space preserved around the hole (A,B,C,D)

電磁電陶煮食爐與抽油煙機的距離最少760毫米
Min.760mm between hob and cookerhood

廚櫃需留活風口
Cabinet need fresh air inlet

電線長度約 1.4 米
The length of the wire: 1.4m

單位:毫米 unit:mm
圖示並不是按比例繪畫 Illustration is not drawn to scale

產品圖像僅用於說明, 可能與實際產品有所不同。
Product images are for illustrative purposes only and may differ from the actual product.



介紹短片

注意安全: 操作時機身會灼熱; 關機後, 機面熱力會在一段時間才逐漸散去。
Warning: The appliance gets hot when in use and remains hot for a while after being switched off.

